Qwik Jon®
PREMIER

Grinder Upflush System

Add a Bathroom Anywhere! No Gravity Drain Required!
Making Bathroom Installations Easy!

FAMILY OWNED

AMERICAN PROUD™

Zoeller Family of Water Solutions™

Features and Benefits:

A quiet, preassembled 1/2 HP grinder pump system requiring minimal space for installation!

Install a complete bathroom without breaking concrete!

Easily connects to a tub, shower, sink, or other fixtures with 2" NPT or 1-1/2" (DN25) slip side inlets.

Tri-Slice® Cutter Technology - three independent cutting channels provide over 250,000 cuts per minute.

Install as a freestanding unit or behind a wall with the extension kit.

Automatic reset thermal overload protects the pump.

Carbon/Ceramic mechanical shaft seal for long life.

Upper and lower ball bearings for efficient and quiet operation.

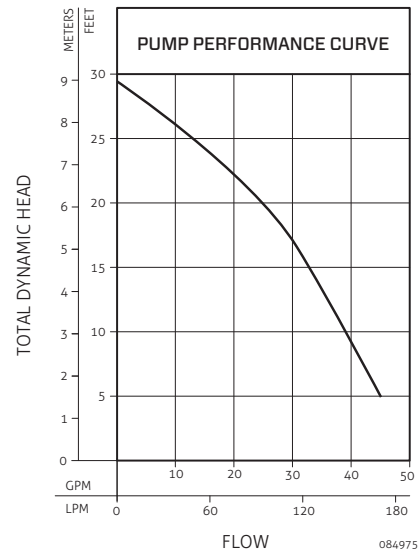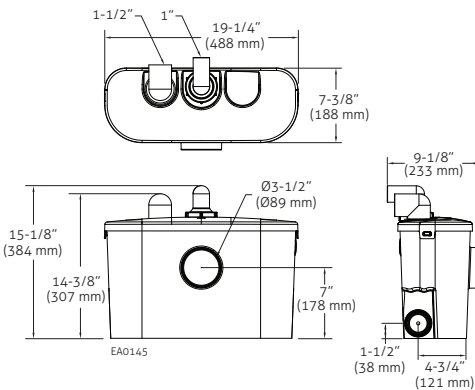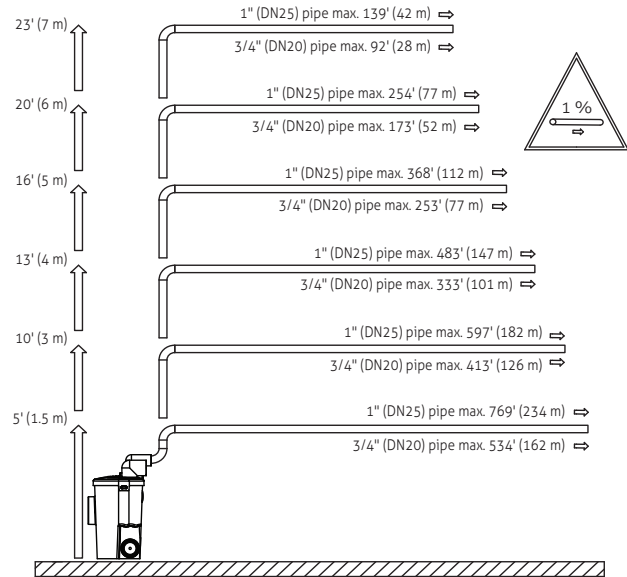Non-clogging vortex impeller for reliable operation.

Recessed side handles for carrying.

Withstands total immersion (IP68).

1" Discharge elbow with built-in check valve.

Standard 6' (1.8 m) cord with right angle plug.

Premium investment-cast 440C stainless steel cutter and cutter plate.

1" (DN25) pipe max. 139' (42 m)
3/4" (DN20) pipe max. 92' (28 m)
1" (DN25) pipe max. 254' (77 m)
3/4" (DN20) pipe max. 173' (52 m)
1" (DN25) pipe max. 368' (112 m)
3/4" (DN20) pipe max. 253' (77 m)
1" (DN25) pipe max. 483' (147 m)
3/4" (DN20) pipe max. 333' (101 m)
1" (DN25) pipe max. 597' (182 m)
3/4" (DN20) pipe max. 413' (126 m)
1" (DN25) pipe max. 769' (234 m)
3/4" (DN20) pipe max. 534' (162 m)

1 %

PUMP PERFORMANCE CURVE

TOTAL DYNAMIC HEAD vs FLOW

084975

Model	Mode	Volts (V)	Ph Ø	Amps (A)	Motor HP	Motor kW (p1)	Weight kg	Weight lbs
201	Vertical Switch	115	1	9.6	1/2	1.0	13.5	29.8

Qwik Jon Premier Part Numbers:

Model #	Product
201-0006	Qwik Jon® Premier grinder pump and tank.
201-0021	Qwik Jon® Premier All-In-One System. QJP & Toilet, 1 box. Ships on a skid.
201-4000	Qwik Jon® Premier Ship-To-Home System. QJP & Toilet, 3 boxes.
202-2000	Qwik Jon® elongated toilet bowl.
202-3002	Qwik Jon® toilet tank and lid.
10-3050	Optional extension kit (available for recessed or behind-the-wall installations).
10-5090	Optional high water Qwik Alarm™ for Qwik Jon® Premier (201-0006).

202-3002

10-5090

202-2000

10-3050

WaterSense Meets EPA Criteria
When used with 1.28 gallon tank and fill valve

Model 202 meets the Americans with Disabilities Act guidelines and ANSI A117.1 requirements for accessible and usable facilities — check local codes